



Sit-stand desk catalogue pages 72-73

Shade card

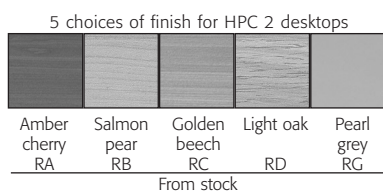

Product description




Tops

- 25 mm thick particle board, density 650 kg/m³;
- wood "ecologically certified" by the PEFC and FSC, in recognition that all or a proportion of the timber used is sourced from sustainably managed forest. Our tops are made from material certified to FSC-STD-40-004 (vers.01);
- particle board certified to E1 (control of formaldehyde emissions) with an emission level of 6.5 mg HCNO/100 mg and compliant with standards EN 120/92 and NF EN 717-2;
- board is covered with a sheet of decorative monochrome or wood effect paper - the décor. During the High Resistance Melamine process, this finish is impregnated with a duroplastic resin to provide maximum protection, an industrial process which ensures that the furniture achieves outstanding results in terms of resistance to scratching and abrasion, thereby meeting the EN438 standard. An additional sheet of paper applied to the underside of tops to provide balance is also impregnated with duroplastic resin;
- edges protected by a 2 mm thick strip of ABS (Acrylonitrile Butadiene Styrene), which is glued to the board and rounded at the top and bottom for maximum user comfort.

Structure

- L shaped steel legs with pressed sheet steel base. Side clearance for easy access;
- the sheet steel uprights are each made up of 3 telescopic sections, adjustable by means of a linear thrust mechanism, with integral control system;
- each upright is fitted with a smooth, high-speed electric motor (37 mm/sec):
 - thrust per upright of 700 N (70 kg), i.e. 140 kg per desk;
 - reverse thrust per upright of 2400 N (240 kg), i.e. 480 kg per desk;
 - sound level: 53 dB maximum;
 - test cycle: 10,000 movements, i.e. 8 years' operating at optimum performance level;
- 700 mm long upper transverse tubular steel bar, thickness 15/10, cross-section 50 x 30 mm;
- electric operating system with built-in transformer, ensuring parallel movement of uprights, even when loads are unevenly distributed.

The Range



description	code	price ex. VAT
-------------	------	---------------

Free-standing desks with electrically operated height adjustment mechanism. Structure in aluminium SA.



Rectangular desk, 160 x 80 cm

1 561 026 + décor + fin.

£ 913



Asymmetrical wave desk, 160 x 100 cm, right-hand version

1 561 027 + décor + fin.

£ 1 029

Asymmetrical wave desk, 160 x 100 cm, left-hand version

1 561 028 + décor + fin.

£ 1 029




Symmetrical wave desk, 160 x 100 cm

1 561 029 + fin.

£ 1 029

Optional extras:



Dual channel articulated vertebral cable holder.

Made from plastic, ø 6.4 cm. Colour: aluminium OI.

6 478 001 OI

£ 44

Hotline catalogue pages 74 to 77

Guarantee and shade card



2 choices of finish for HPC 2 melamine desktops



Salmon pear RB
Golden beech RC
From stock

4 choices of colour for structures/screens



Aluminium/ Graphite grey/ Pastel green/ Mid blue
SA MY SA NL SC MY SC NL
Sur stock

1 colour choice for structure / fabric panel



Aluminium/ Mid blue
SA TC
From stock



Product description

Tops

- 25 mm thick particle board, density 650 kg/m³;
- Wood "ecologically certified" by the PEFC and FSC, in recognition that all or a proportion of the timber used is sourced from sustainably managed forest. Our tops are made from material certified to FSC-STD-40-004 (vers.01);
- Particle board certified to E1 (control of formaldehyde emissions) with an emission level of 6.5 mg HCNO/100 mg and compliant with standards EN 120/92 and NF EN 717-2;
- Board is covered with a sheet of decorative monochrome or wood effect paper. During the High Resistance Melamine process, this paper is impregnated with a duroplastic resin to provide maximum protection, an industrial process which ensures that the furniture achieves outstanding results in terms of resistance to scratching and abrasion, thereby meeting the EN438 standard. An additional sheet of paper applied to the underside of tops to provide balance is also impregnated with duroplastic resin;
- Edges protected by a 2 mm thick strip of ABS (Acrylonitrile Butadiene Styrene), which is glued to the board and rounded at the top and bottom for maximum user comfort;
- Desktop fire safety classification: in accordance with the FD - P92-057 standard, particle board greater or equal to 18 mm in thickness is classified as M3 (combustible, moderately flammable);
- Maintenance advice: use soapy water and avoid products which contain solvents.

Structure

- In the form of an assembly comprising screens and upper and lower metal panels, which combine to create a central anchor point for screens. Brackets, 30/10 thickness, are attached to the screens to support the desktop;
- In the case of symmetrical 90° workstations, panel legs, W. 420 mm, must be placed beneath the 2 returns to ensure stability;
- In the case of asymmetrical 90° workstations, screens, H. 1200 mm, are placed at the 2 ends of linear configurations but may be replaced by panel legs, W. 700 mm x H. 690 mm.
- Rectilinear side screens made from 25 mm thick non-reflective melamine-faced particle board, density 650 kg/m³, are used in linear and 60° or 90° star-shaped configurations.
- Rectilinear melamine front screens, made to the same specifications as the side screens, are used only with asymmetrical 90° workstations in linear configurations.
- Curved melamine side screens, made to the same specifications as the rectilinear side screens, are used in 60°, 90° and linear configurations.
- Curved fabric side screens, made to the same specifications as the rectilinear side screens, are composed of 3 mm thick fire-retardant soundproof polyurethane foam, density 25 kg/m³, covered in mid blue fabric.

Structural panels








- Made from folded and perforated sheet steel, 12/10 thickness, panels clip on to the screens and contain a semicircular cut-out cable port at the bottom, radius 70 mm.

description	code	price ex. VAT	code	price ex. VAT	code	price ex. VAT
Asymmetrical 90° modules						
				4 workstations		6 workstations
				8 workstations		
Rectilinear melamine screens. Optional extras: ① ② ③ ⑤ ⑥						
	1 686 002 + top fin. + structure fin.	£ 1 874	1 686 004 + top fin. + structure fin.	£ 2 811	1 686 006 + top fin. + structure fin.	£ 3 747
Curved melamine screens. Optional extras: ② ③ ④ ⑤ ⑥						
	1 686 001 + top fin. + structure fin.	£ 2 076	1 686 003 + top fin. + structure fin.	£ 3 117	1 686 005 + top fin. + structure fin.	£ 4 151
Curved fabric screens. Optional extras: ② ③ ⑤ ⑥						
	1 686 007 + top fin. + SA TC	£ 2 990	1 686 008 + top fin. + SA TC	£ 4 736	1 686 009 + top fin. + SA TC	£ 6 487

Asymmetrical 90° modules - linear configurations

description	code	price ex. VAT	code	price ex. VAT	code	price ex. VAT
Rectilinear melamine screens. Optional extras: ① ② ③ ⑤ ⑥						
	Starter module (D)	1 686 019 + top fin. + structure fin.	£ 599	1 686 015 + top fin. + structure fin.	£ 599	
	Add-on module (S)	1 686 021 + top fin. + structure fin.	£ 498	1 686 017 + top fin. + structure fin.	£ 498	
Curved melamine screens. Optional extras: ① ② ③ ④ ⑤ ⑥						
	Starter module (D)	1 686 018 + top fin. + structure fin.	£ 700	1 686 014 + top fin. + structure fin.	£ 700	
	Add-on module (S)	1 686 020 + top fin. + structure fin.	£ 540	1 686 016 + top fin. + structure fin.	£ 540	
Curved fabric screens. Optional extras: ① ② ③ ⑤ ⑥						
	Starter module (D)	1 686 012 + top fin. + SA TC	£ 1 345	1 686 010 + top fin. + SA TC	£ 1 345	
	Add-on module (S)	1 686 013 + top fin. + SA TC	£ 988	1 686 011 + top fin. + SA TC	£ 988	

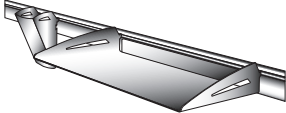description	code	price ex. VAT	code	price ex. VAT
Asymmetrical 90° modules - face to face configurations				
			 2 workstations starter module	 2 workstations Add-on module
Rectilinear melamine screens. Optional extras: ① ② ③ ⑤ ⑥				
 D	 S	Starter modules 1 686 023 + top fin. + structure fin. £ 1 106 Add-on modules — —	—	—
Curved melamine screens. Optional extras: ① ② ③ ④ ⑤ ⑥				
 D	 S	Starter modules 1 686 022 + top fin. + structure fin. £ 1 307 Add-on modules — —	—	1 686 024 + top fin. + structure fin. £ 1 001
Curved fabric screens. Optional extras: ① ② ③ ④ ⑥				
 D	 S	Starter modules 1 686 026 + top fin. + SA TC £ 2 423 Add-on modules — —	—	1 686 027 + top fin. + SA TC £ 1 715
Symmetrical 60° modules				
			 3 workstations	 6 workstations
Rectilinear melamine screens. Optional extras: ① ② ③ ⑤ ⑥				
 3 workstations	 6 workstations	1 686 029 + top fin. + structure fin. £ 1 262	1 686 031 + top fin. + structure fin.	£ 2 117
Curved melamine screens. Optional extras: ② ③ ④ ⑤ ⑥				
 3 workstations	 6 workstations	1 686 028 + top fin. + structure fin. £ 1 495	1 686 030 + top fin. + structure fin.	£ 2 459
Curved fabric screens. Optional extras: ② ③ ⑤ ⑥				
 3 workstations	 6 workstations	1 686 032 + top fin. + SA TC £ 2 382	1 686 033 + top fin. + SA TC	£ 3 945
Symmetrical 90° modules				
			 2 workstations	 4 workstations
Rectilinear melamine screens. Optional extras: ① ② ③ ⑤ ⑥				
 2 workstations	 4 workstations	1 686 035 + top fin. + structure fin. £ 988	1 686 037 + top fin. + structure fin.	£ 1 774
Curved melamine screens. Optional extras: ② ③ ④ ⑤ ⑥				
 2 workstations	 4 workstations	1 686 034 + top fin. + structure fin. £ 1 166	1 686 036 + top fin. + structure fin.	£ 2 021
Curved fabric screens. Optional extras: ② ③ ⑤ ⑥				
 2 workstations	 4 workstations	1 686 038 + top fin. + SA TC £ 1 874	1 686 039 + top fin. + SA TC	£ 2 926

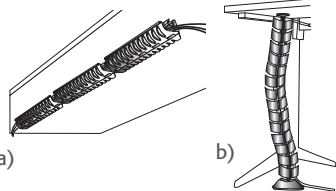	description	code	price ex. VAT
Optional extras			
	<p>① Accessory rail W. 96 cm. For attachment to rectilinear screens (screws supplied). Compatible with Puebla accessories. Finish: aluminium (SA).</p>	1 686 040 SA	£ 29
	<p>② Decorative covers for 60° and 90° configurations Finish: aluminium (SA) or graphite grey (SC). Designed to house ISOS lamps. 60° cover (6 lamps max.) 90° cover (4 lamps max.)</p>	1 686 041 + fin. 1 686 042 + fin.	£ 68 £ 38
	<p>③ DELTA lamp For attachment to 60° and 90° covers or to accessory rails ①. Fixings supplied. Finish: aluminium ZA or graphite grey ZB. 11 W. fluorescent bulb supplied. Level II safety classification, double insulation </p>	N/A	N/A
	<p>④ Designer top extension For use with curved melamine screens only. Attached by means of 2 chrome-plated clamps. Made from methacrylate (5 mm thick) in blue (ON) or green (OO).</p>	1 686 045 + col.	£ 82
	<p>⑤ Cable management kit</p> <p>a) horizontal: In the form of 3 dual compartment articulated plastic cable troughs. Aluminium (Oi) finish.</p> <p>b) vertical: In the form of an articulated vertebral cable holder, ø 64 mm. Aluminium (OI) finish.</p>	6 478 002 OI 6 478 001 OI	£ 37 £ 44
	<p>⑥ Screen link panels H. 120 cm. Made from perforated sheet steel and designed to clip on to screens. Supplied complete with one half of a decorative cover. Finish: aluminium (SA) or graphite grey (SC). For 60° configurations For 90° configurations</p>	1 686 043 + fin. 1 686 044 + fin.	£ 104 £ 79